

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B60J 7/08		A1	(11) International Publication Number: WO 96/32295
(21) International Application Number: PCT/GB96/00695		(43) International Publication Date: 17 October 1996 (17.10.96)	
(22) International Filing Date: 25 March 1996 (25.03.96)		(81) Designated States: GB, JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(30) Priority Data: 9507727.7 13 April 1995 (13.04.95) GB		Published With international search report.	
(71) Applicant (for all designated States except US): ROVER GROUP LIMITED [GB/GB]; International House, Bickenhill Lane, Bickenhill, Birmingham B37 7HQ (GB).			
(72) Inventors; and (75) Inventors/Applicants (for US only): THOMPSON, James [GB/GB]; 29 Beechwood Road, Camphill Estate, Nuneaton, Warwickshire CV10 9DP (GB). FAWDREY, David, Charles [GB/GB]; 68 Bicester Road, Kidlington, Oxford OX5 2LF (GB). GOODHEW, Sarah [GB/GB]; 5 Broomybank, Kenilworth, Warwickshire CV8 2SF (GB).			
(74) Agent: BURRAGE, David, John; Rover Group Limited, Patent Dept., Gaydon Test Centre, Banbury Road, Lighthorne, Warwickshire CV35 0RG (GB).			

(54) Title: **AN ELECTRICALLY MOVEABLE WINDOW ASSEMBLY AND CONTROL MEANS FOR A MOTOR VEHICLE**

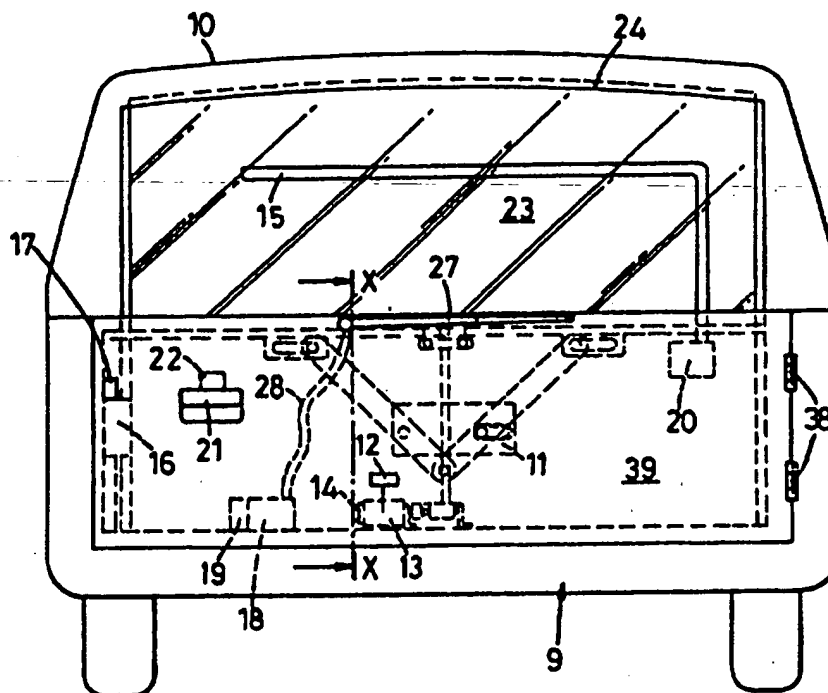

(57) Abstract

An electrically moveable window assembly and control means for a motor vehicle is disclosed in which when a detachable rear roof section (10) is removed or a retractable rear roof section is folded a frameless window (23) supported by a rear door (39) of the motor vehicle is automatically retracted into the door (39) to prevent it becoming damaged.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
				UZ	Uzbekistan

An Electrically Moveable Window Assembly and Control
means for a Motor Vehicle

This invention relates to motor vehicles having a removable or retractable rear roof section and in particular to an electrically movable rear window assembly and control means for such a motor vehicle.

5 According to the invention there is provided a motor vehicle having a removable or retractable rear roof section, a roof sensor means to sense the removal or retraction of the rear roof section and a number of doors including a rear door supporting a frameless electrically
10 actuated rear window, the rear window being movable by an electric motor in response to a signal received from an electronic controller between a closed position in which the upper edge of the rear window is engaged with an upper door seal attached to the rear roof section and an open
15 position in which the rear window is fully retracted into the lower part of the rear door wherein when the rear roof section is removed or retracted the roof sensor means sends a signal to the electronic controller to cause the electric motor to move the rear window to said open position.

20 This has the advantage that whenever the roof is removed the rear window is always retracted thereby protecting the rear window.

- 2 -

The roof sensor means may be associated with securing means used to secure the removable rear roof section in position or with securing means used to secure the retractable rear roof section in an erect position.

- 5 The window may be maintained in said open position so long as the sensor means indicates that the rear roof section is not in position.

The rear door may be fitted with a sensor to sense whether the rear door is open or closed and if the signal
10 from the sensor indicates that the rear door is open the rear window is prevented from moving into a closed or up position.

The rear window may be fitted with an electric screen heater which is isolated before the rear window is allowed
15 to move into an open position.

The rear window may be fitted with an electrically actuated window wiper which is moved into a parked position before the rear window is allowed to move into an open position.

- 20 Preferably the wiper is parked off of the window before the window is moved into a fully open position.

The invention will now be described by way of example with reference to the accompanying drawing of which:-

- 3 -

Fig.1: is a rear view of a motor vehicle including an electrically moveable rear window assembly according to the invention;

Fig.2: is a cross section on the line X-X on Fig.1;

5 Fig.3: is a cross section through a roof securing means forming part of the invention;

Fig.4: is a block diagram of an electronic control circuit according to the invention;

Fig.5: is a simplified flow chart showing the major
10 logical operations performed by the control circuit of Fig.4.

With reference to Figs.1 to 5 there is shown a motor vehicle having a rear body structure 9 to which is releasably secured by securing means 25 a detachable rear
15 roof section 10.

A rear door 39 is pivotally connected to the rear body structure 9 of the motor vehicle by means of a pair spaced apart hinges 38 and is securable in a closed position by means of an electrically operated locking means 16 attached
20 to part of the structure of the rear door 39.

An operator controllable door release in the form of a door handle 21 is connected to an associated microswitch 22

- 4 -

to provide an open door signal to an electronic controller 11.

Upon receipt of a door open request from the microswitch 22 the electronic controller 11 sends a control signal to the electrically operated locking means 16 to unlatch the door.

The electronic controller 11 is also connected to and receives inputs from a door position sensor 17 used to sense whether the rear door 39 is open or closed, a roof sensor 26 used to sense whether the removable roof section 10 is in place or removed and a window position sensor 14 used to sense the position of a moveable window pane 23.

The window 23 is slidably supported by the rear door 39 and is moveable from a fully closed position, as shown in Figure 1, in which it is engaged at its upper edge with a 'U' shaped roof seal 24 to a fully open position, as shown in Fig.2, in which the window 23 is fully retracted into the lower part of the rear door 39 by means of a window lift motor 13 in response to a control signal from the electronic controller 11 to a window lift motor controller 12.

The window 23 is fitted with a heating element 15 which is connected to the electronic controller 11 by means of a rear screen heater controller 20 which in this case is a electric relay.

- 5 -

A rear screen wiper 27 is connected to a wiper motor 18 by means of a flexible drive 28 and is moveable from an off-screen parked position, as shown in Figs.1 and 2, to an on screen wiping mode by means of the motor 18 in response
5 to a signal received from a wiper motor controller 19. The wiper motor controller 19 is connected to and receives control signals from the electronic controller 11.

The detachable rear roof section 10 is normally held in place by a number of roof securing means 25 of which one is
10 shown in Fig 3. Each of the roof securing means is fitted to the rear body structure 9 of the motor vehicle and comprises of a slideable plate member 31 having a slot therein into which a recessed peg 32 attached to part of the structure of the detachable roof section 10 is
15 engagable.

The plate 31 is moveable by means of a knob 30 from a locking position, as shown in Fig.3, in which the peg 32 is
prevented from becoming disengaged from the plate 31 by means of engagement of the plate 31 with the recess in the
20 peg 32 to a second position in which the peg is able to move freely through the slot in the plate 31.

A roof sensor in the form of a microswitch 26 is associated with each securing means 25 and is positioned so as to sense the presence of the peg 32 in the plate 31.
25 When the peg 32 is withdrawn from the plate 31, which corresponds to the removal of the rear roof section 10 from

- 6 -

the rear body structure 9, the microswitch 26 is actuated and sends a signal to the electronic controller 11 indicating that the detachable roof section 10 has been removed.

5 Operation of the window assembly is best understood with reference to Figure 5.

When the rear roof section 10 is in position on the rear body structure 9 the microswitch 26 sends a signal to the electronic controller 11 indicating that the roof section
10 10 is in place.

The electronic controller 11 monitors the output from the door sensor 17 to determine whether the rear door 39 is open or closed. If the signal from the door sensor 17 indicates that the door 39 is open then no further action
15 occurs but if the door sensor 17 indicates that the door 39 is shut then the electronic controller 11 monitors the output from the driver operable window lift switch to determine whether there is a demand for the window 23 to be moved up or down.

20 If there is a demand for the window 23 to be moved down the electronic controller 11 checks to see whether the screen heater 15 is isolated and that the wiper 27 is parked and if not places these devices into a safe condition before allowing the window 23 to be moved.

- 7 -

If the drivers window switch has been disabled then this is reconnected so that the window position can be controlled by the drivers switch. The position of the window 23 is continually monitored and as soon as it reaches the fully open position the power to the window lift motor 13 is automatically switched off by the electronic controller 11 to prevent overheating.

If there is a demand for the window 23 to be moved up the electronic controller 11 checks to see whether the drivers window switch has been disabled and if so this is reconnected so that the window position can be controlled by the drivers switch. The position of the window 23 is continually monitored and as soon as it reaches the fully up or closed position the power to the window lift motor 13 is automatically switched off by the electronic controller 11 to prevent overheating.

As soon as the output from the window position sensor 14 indicates that the window is in the fully up or closed position the electronic controller 11 enables the rear screen heater control unit 20 and the wiper motor control unit 19 so that, if required, the rear screen heater 15 and wiper 27 can be used under the direction of operator controlled switches (not shown). The operator controlled switches for the wiper 27 and the screen heater 15 are isolated while the window 23 is open to prevent misus .

- 8 -

Although not shown on Fig 5 when the door 39 is opened while the rear roof section 10 is fitted to the rear structure 9 of the vehicle the window 23 is prevented from being raised by the window lift motor 13 and automatically drops a small amount when the door is opened. The window cannot then be raised until the door 39 is shut.

When the rear roof section 10 is sensed by the microswitches 26 to be in place and the door 39 is shut the window lift motor control unit 12 is responsive to window position commands received from a driver operable window switch and will be moved to the required position as demanded by the operator controlled switch.

However before the window 23 can be moved from the fully closed position the electronic controller 11 always isolates the screen heater 15 and parks and isolates the wiper 27 before the window lift motor control unit 12 is activated by the electronic controller 11 to respond to signals received from the operator controlled switch. By performing this routine it is ensured that the window 23 cannot be moved to an open position without switching off the heater 15 and parking the wiper 27.

This is important because if the heater 15 is switched on while the screen 23 is retracted into the lower part of the door 39 damage to the seal 36 on the upper edge of the lower part of the door can occur. In addition, if the wiper 27 is to be moved to the fully open position the

- 9 -

wiper 27 is moved to an off parked screen parked position so that the wiper 27 it does not interfere with the subsequent closing of the window 23.

When the detachable rear roof section 10 is removed from the rear body structure 9 of the motor vehicle the microswitches 26 associated with the roof securing means 25 send a signal to the electronic controller 11 indicating that the roof section 10 has been removed. If the window 23 is not already fully down the electronic controller 11 first isolates the screen heater 15 and off-screen parks the wiper 27 before sending a signal to the window lift controller 12 to fully open the window 23. After the window 23 is lowered to the fully open position the driver operable window switch is disabled so that even if a window move input is applied to the switch the window 23 will not move. This condition is retained so long as the roof 10 is removed so that the window 23 remains in the fully lowered position while the roof 10 is off.

Therefore whenever the roof section 10 is removed the window 23 is automatically retracted fully into the lower part of the door 39 thereby ensuring that the window 23 cannot be damaged.

Although the invention has thus far been described with respect to a motor vehicle having a removable rigid rear roof section it will be appreciated that it is equally applicable to a motor vehicle having a retractable rear

- 10 -

roof section, such vehicles are often referred to as a cabriolet or a convertible.

In this case the roof sensors 26 would be employed to sense whether the roof was erect and fastened in position.

5 When the roof is sensed to be not in an erect and fastened position the system will operate in the same manner as in the roof off situation discussed in detail above.

10 Similarly, when the roof is sensed to be erect and secured in place the control system will operate as discussed above with reference to the roof section being in place.

It will be appreciated by those skilled in the art that the invention is not limited to the use of microswitches to
15 sense roof presence it is merely necessary to provide at least one sensor capable of sensing the presence or absence of the roof.

It will also be appreciated that the window lift mechanism shown and described herein is given as an example
20 and there are numerous other window lift mechanisms that could be employed.

CLAIMS

1. A motor vehicle having a removable or retractable rear roof section (10), a roof sensor means (26) to sense the removal or retraction of the rear roof section (10) and a number of doors including a rear door (39) supporting a frameless electrically actuated rear window (23), the rear window (23) being movable by an electric motor (13) in response to a signal received from an electronic controller (11) between a closed position in which the upper edge of the rear window is engaged with an upper door seal (24) attached to the rear roof section (10) and an open position in which the rear window is fully retracted into the lower part of the rear door (39) wherein when the rear roof section (10) is removed or retracted the roof sensor means (26) sends a signal to the electronic controller (11) to cause the electric motor (13) to move the rear window (23) to said open position.
2. A motor vehicle as claimed in Claim 1 in which the roof sensor means (26) is associated with a securing means (25) used to secure the removable rear roof section (10) in position.
3. A motor vehicle as claimed in Claim 1 or in Claim 2 in which the window (23) is maintained in said open

- 12 -

position so long as the sensor means (26) indicates that the rear roof section (10) is not in position.

4. A motor vehicle as claimed in any preceding claim in which the rear door (39) is fitted with a sensor (17) to sense whether the rear door (39) is open or closed and if the signal from the sensor (17) indicates that the rear door (39) is open the rear window (23) is prevented from moving into a closed or up position.
5. A motor vehicle as claimed in any preceding Claim in which the rear window (23) is fitted with an electric screen heater (15) which is isolated before the rear window (23) is allowed into move to an open position.
6. A motor vehicle as claimed in any preceding Claim in which the rear window (23) is fitted with an electrically actuated window wiper (27) which is moved into a parked position before the rear window (23) is allowed to move into an open position.
7. A motor vehicle as claimed in Claim 6 in which the wiper is parked off of the window (23) before the window (23) is allowed to move into a fully open position.

1/4

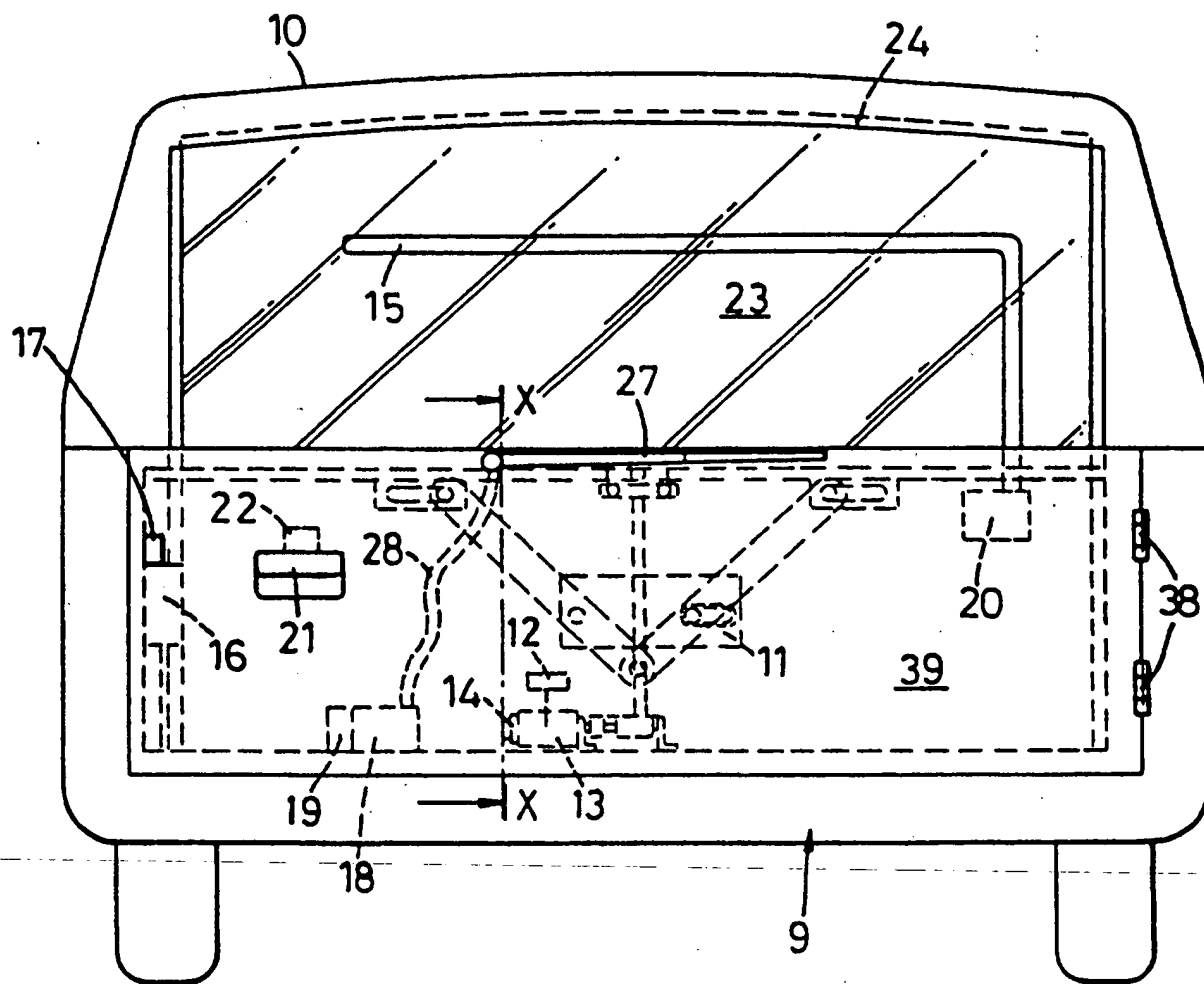


Fig. 1

214

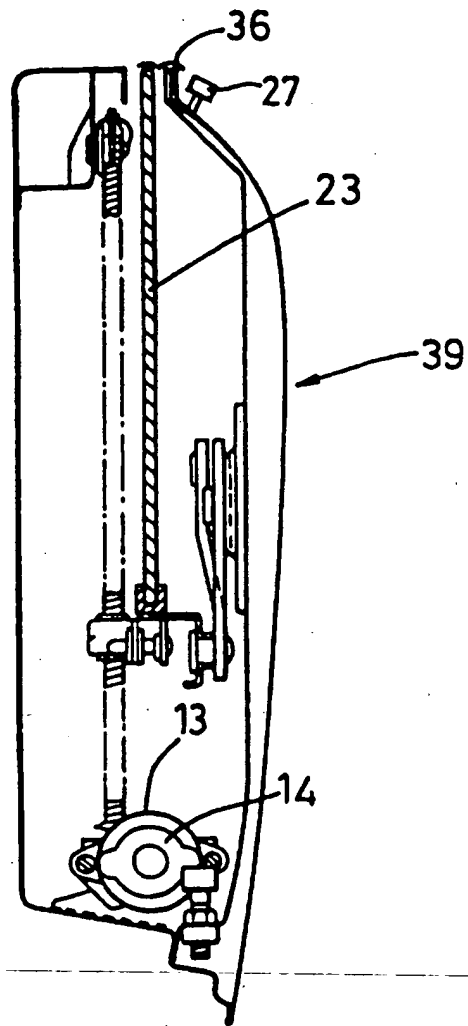


Fig. 2

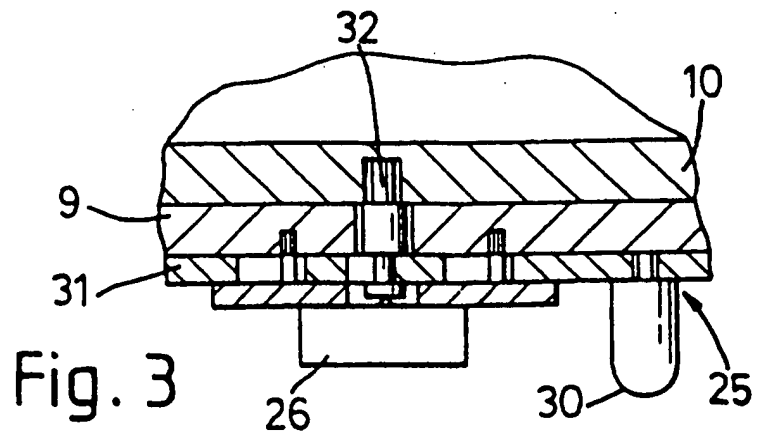


Fig. 3

3/4

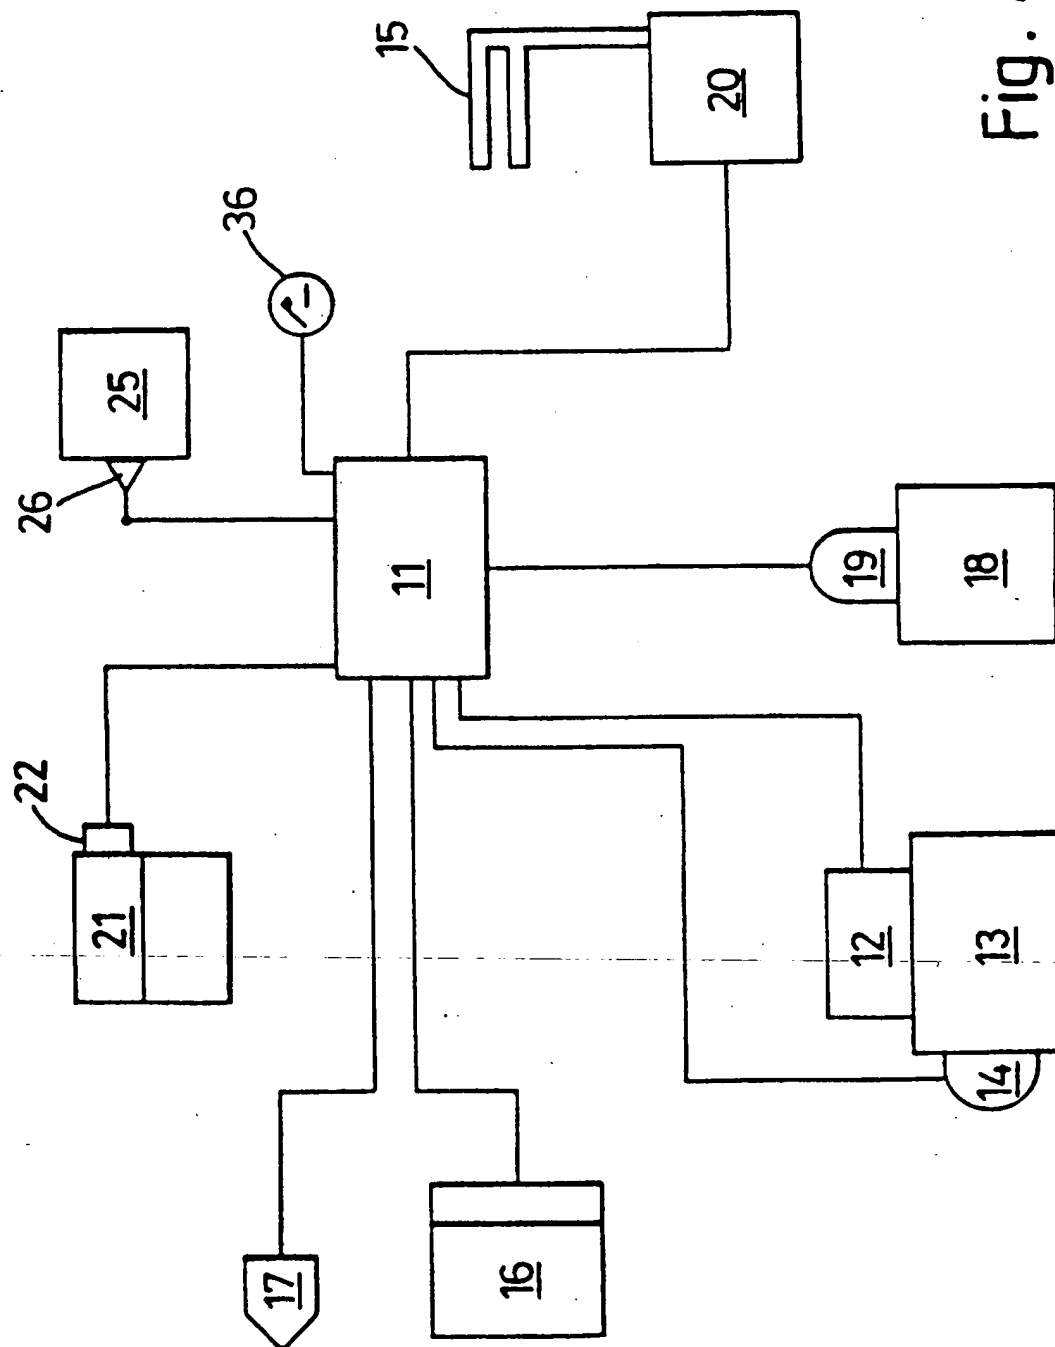


Fig. 4

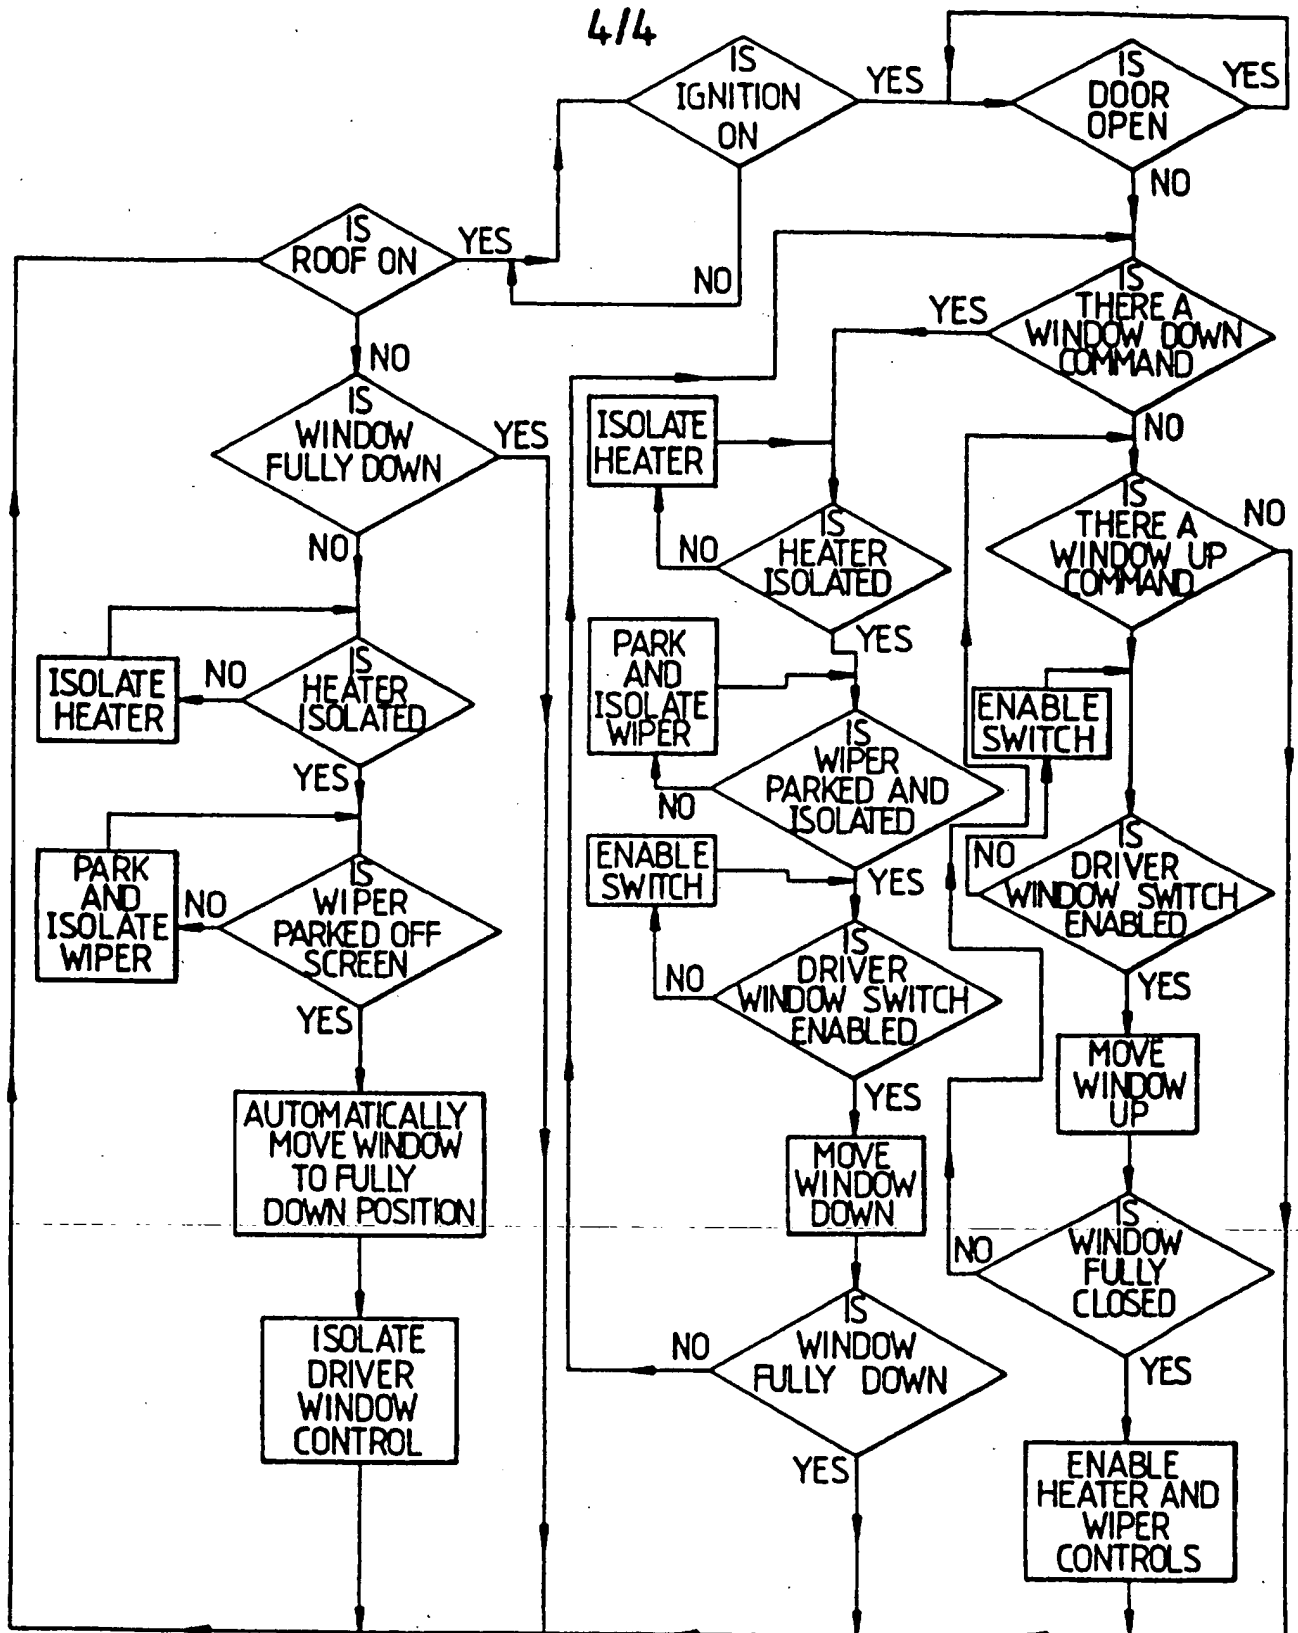


Fig. 5

INTERNATIONAL SEARCH REPORT

Int. Appl. No.

PCT/GB 96/00695

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B60J7/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B60J B60R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 550 952 (ASC INCORPORATED) 14 July 1993 see column 3, line 45 - column 7, line 34; figures 1-11	1-4
A	US,A,4 729 592 (TUCHIYA ET AL.) 8 March 1988 see column 1, line 46 - column 2, line 36 see column 4, line 61 - column 5, line 19; figures 1-9	1-4
A	FR,A,2 699 868 (CHAUSSON INGENIERIE) 1 July 1994 see page 3, line 5 - page 6, line 9; figures 1-5	1
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

5 July 1996

Date of mailing of the international search report

08.07.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,

Authorized officer

Geyer. J-L

INTERNATIONAL SEARCH REPORT

Int. Patent Application No
PCT/GB 96/00695

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE,A,36 39 377 (MAZDA) 27 May 1987 see column 9, line 43 - column 12, line 63; figures 1-8,15,21 ---	1-4
A	ATZ, vol. 91, no. 6, June 1991, STUTTGART , DE, pages 313-318, XP000082928 HUBER ET AL.: "DER NEUE MERCEDES - ROADSTER -- KAROSSERIE : KLIMATISIERUNG , VERDECK UND SCHLIESSUNG" see page 313, column 1, line 58 - page 315, column 1, line 25; figures 5,6,8,9 -----	1-4

INTERNATIONAL SEARCH REPORT

Int. Application No

PCT/GB 96/00695

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-550952	14-07-93	US-A- 5225747	06-07-93
		AU-B- 655489	22-12-94
		AU-B- 2120192	08-07-93
		DE-D- 69208444	28-03-96
		DE-T- 69208444	04-07-96
		JP-A- 6171372	21-06-94
		US-A- 5451849	19-09-95

US-A-4729592	08-03-88	JP-B- 6028976	20-04-94
		JP-A- 62120217	01-06-87

FR-A-2699868	01-07-94	NONE	

DE-A-3639377	27-05-87	JP-B- 6026930	13-04-94
		JP-A- 62255224	07-11-87
		JP-B- 6028973	20-04-94
		JP-A- 62120219	01-06-87
		JP-C- 1880392	21-10-94
		JP-B- 6000465	05-01-94
		JP-A- 62120221	01-06-87
		US-A- 4796943	10-01-89
